




Plymasters

Perfect Matte


Plymasters Perfect Mate is a soft touch, hot lacquer coated laminate on MR MDF.

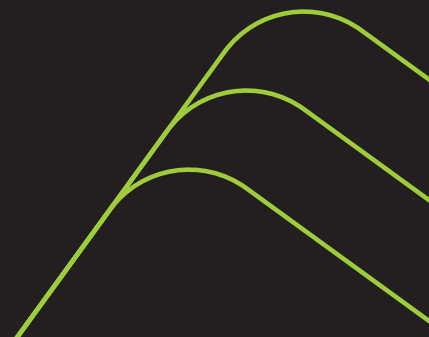

Perfect Matte

Matte melamine 1 Face 1 Back pressed onto MR MDF.

Key Features:

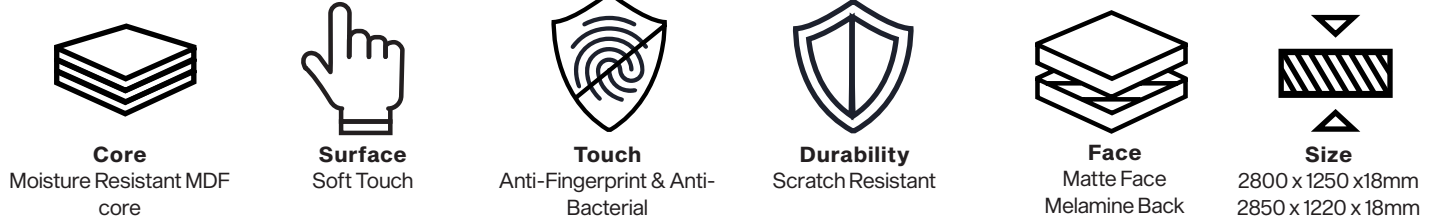


Code	Sheet Size	Thickness	Colour	Weight	Face
MMPP19-PW	2800 x 1250	18mm	Pure White	46.2kg	1Face 1Back
MMPP19-PB	2800 x 1250	18mm	Pure Black	46.2kg	1Face 1Back
MMPP19-MG	2800 x 1250	18mm	Marengo Grey	46.2kg	1Face 1Back
MMPP19-SG	2800 x 1250	18mm	Stone Grey	46.2kg	1Face 1Back
MMPP19-T	2850 x 1220	18mm	Terracotta	46.2kg	1Face 1Back
MMPP19-ME	2850 x 1220	18mm	Mare	46.2kg	1Face 1Back
MMPP19-BO	2850 x 1220	18mm	Bosco	46.2kg	1Face 1Back
MMPP19-V	2850 x 1220	18mm	Visone	46.2kg	1Face 1Back

Scope of Use:

- Kitchen Fronts & Cabinetry
- Joinery
- Commercial Fit Outs
- Furniture

Colour Range:

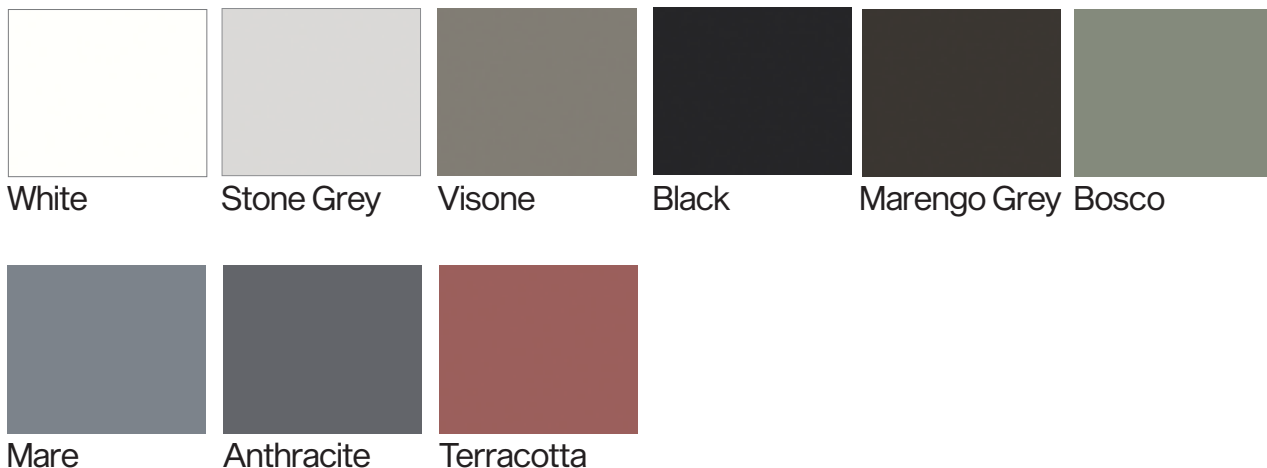

Perfect Matte

Matte melamine 1 Face 1 Back pressed onto MR MDF.

Technical Specs

Melamine Thickness	0.1mm
Core	Moisture Resistant MDF
Environment	Eco Freindly - 100% PVC Free
Origin	Germany
Certification	MR MDF Core - E1 Emission Rating

Limitations of use

Interior use only. Not be used in areas directly exposed to water.

Application

Melaboard panels are not suitable for use in exterior applications or interior projects where the moisture content would be higher than normal (for eg. a indoor pool or sauna). Melamine has excellent water resistance properties however care should be taken not to expose the edges to high moisture applications.

Edge Trimming & CNC

Due to the production process, 15mm must be trimmed from all the edges of the panel material prior to subsequent processing. Trimming must take place for all panel thicknesses and all material. CNC Machines should be programmed to allow for trimming

Surface defects in this area do not constitute grounds for complaint. Edge trimming must be taken into consideration before placing an order.

Our products can be found on:



Certifications / Performance Attributes



Perfect Matte

Matte melamine 1 Face 1 Back pressed onto MR MDF.

Handling

While this is a moisture resistant product, care should still be taken to prevent direct exposure to water. Temperature variation may cause internal stresses causing previously flat sheets to bow. Precautions are taken to minimize this effect. However, once the sheets have left our warehouse we cannot guarantee sheets to remain flat unless fastened. This is particularly important where free standing kitchen/cabinet doors are concerned. When storing panels, stack with enough support to prevent sagging. Cover the pallet to protect top and edges.

Maintenance

Avoid using products that are highly acidic or alkaline to prevent staining. Do not use abrasive substance or cleaning utensils such as sand paper, steel wool or abrasive sponges. A mild soap solution is sufficient for cleaning.

Important: The use of abrasive cleaning and scouring agents can result in damage. Do not use cleaning agents which contain alcohol as they are abrasive or corrosive.

Colour Consistency

Perfect Matte has a consistent Acrylic surface. However there may be very slight differences in Laminate colour between factory batches.

*Please note that the Metallic Anthracite sheets have an attractive, irregular hue that is created by the uneven metallic pattern across the sheets which results in a beautiful, unique appearance.

Exposure to sunlight

Perfect Matte may fade if exposed to direct UV light over a long period of time.

Edge Tape



Matching Perfect Matte edge tape available to cover the exposed MDF edges. This offers aesthetic and functional benefits, hiding the MDF core and providing moisture resistance by sealing in the MDF edge.

Plymasters Perfect Matte edge tape is available in ABS unglued 22 x 1mm and 43 x 1mm - with an optional pre-glue service for easier application.

Fixing

For laminate surfaces we recommend chipboard screws which can be found at your local retailer.



