





Plymasters

Perfect Matte

Plymasters Perfect Matte is a soft touch, hot lacquer coated laminate on MDF.

Matching Edge Tape Available.

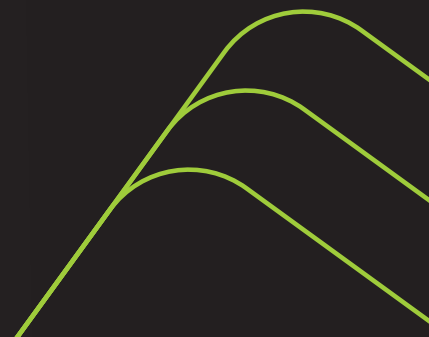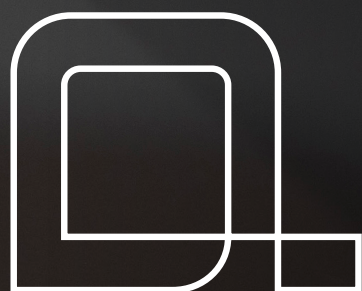

Perfect Matte

Hot lacquer coated laminate 1 Face 1 Melamine Back pressed onto MDF.

Key Features:



Core
MDF core




Soft Touch
Silky Feel




Anti-Fingerprint
Anti-Fingerprint & Anti-Bacterial



Impact Resistant
Durable, Knock Resistant Surface



Face
Matte Face
Melamine Back



Size
2850 x 1220 x 18mm

Code	Sheet Size	Thickness	Colour	Weight	Face
MMPP19-PW	2800 x 1250	18mm	Pure White	46.2kg	1Face 1Back
MMPP19-PB	2800 x 1250	18mm	Pure Black	46.2kg	1Face 1Back
MMPP19-MG	2800 x 1250	18mm	Marengo Grey	46.2kg	1Face 1Back
MMPP19-T	2850 x 1220	18mm	Terracotta	46.2kg	1Face 1Back
MMPP19-ME	2850 x 1220	18mm	Mare	46.2kg	1Face 1Back
MMPP19-BO	2850 x 1220	18mm	Bosco	46.2kg	1Face 1Back
MMPP19-V	2850 x 1220	18mm	Visone	46.2kg	1Face 1Back
MMPP19-AX	2850 x 1220	18mm	Anthracite	46.2kg	1Face 1Back

Uses

Kitchen Cabinetry
Commercial Cabinetry
& Fit Outs
Joinery
Furniture



Super Matte
Minimal light
reflectance



Auto-Regeneration
Thermal repair
of micro-scratches



**Scratch & Abrasion
Resistant**
Resistant to
Surface wear

Colour Range:



White



Visone



Black



Bosco



Mare



Anthracite



Terracotta



Marengo Grey



Perfect Matte

Hot lacquer coated laminate 1 Face 1 Melamine Back pressed onto MDF.

Technical Specs

Melamine Thickness	0.1mm
Core	MDF
Environment	Eco Friendly - 100% PVC Free
Origin	Spain
Certification	MDF Core - E0 Emission Rating / CARB 2

Limitations of use

Interior use only. Not be used in areas directly exposed to water.

Application

Melaboard panels are not suitable for use in exterior applications or interior projects where the moisture content would be higher than normal (for eg. a indoor pool or sauna). Melamine has excellent water resistance properties however care should be taken not to expose the edges to high moisture applications.

Edge Trimming & CNC

Due to the production process, 15mm must be trimmed from all the edges of the panel material prior to subsequent processing. Trimming must take place for all panel thicknesses and all material. CNC Machines should be programmed to allow for trimming

Surface defects in this area do not constitute grounds for complaint. Edge trimming must be taken into consideration before placing an order.

Our products can be found on:



Certifications / Performance Attributes



Perfect Matte

Hot lacquer coated laminate 1 Face 1 Melamine Back pressed onto MDF.

Handling

Care should still be taken to prevent direct exposure to water. Temperature variation may cause internal stresses causing previously flat sheets to bow. Precautions are taken to minimize this effect. However, once the sheets have left our warehouse we cannot guarantee sheets to remain flat unless fastened. This is particularly important where free standing kitchen/cabinet doors are concerned. When storing panels, stack with enough support to prevent sagging. Cover the pallet to protect top and edges.

Maintenance

Avoid using products that are highly acidic or alkaline to prevent staining. Do not use abrasive substance or cleaning utensils such as sand paper, steel wool or abrasive sponges. A mild soap solution is sufficient for cleaning.

Important: The use of abrasive cleaning and scouring agents can result in damage. Do not use cleaning agents which contain alcohol as they are abrasive or corrosive.

Auto Regeneration Guide

Perfect Matte features a thermal self-healing surface that can reduce or eliminate minor superficial scratches. This process is designed for light surface marks only and is not intended to repair deep scratches, cracks, or structural damage.

Place a folded paper towel directly over the scratched area. Spray water evenly over the paper towel until thoroughly damp but not dripping. Set the iron to medium heat — 120°C (wool/2-dot setting). Turn steam off. Move the iron over the area in gentle circular motions for up to 30 seconds. Keep the iron moving and do not allow the paper towel to dry out completely. Remove the paper towel and immediately dry the surface with a clean microfibre cloth. If the scratch is still visible once the surface has cooled, repeat the process.

Colour Consistency

Perfect Matte has a consistent laminate surface. However there may be very slight differences in Laminate colour between factory batches.

Exposure to sunlight

Perfect Matte may fade if exposed to direct UV light over a long period of time.

Edge Tape



Matching Perfect Matte edge tape available to cover the exposed MDF edges. This offers aesthetic and functional benefits, hiding the MDF core and providing moisture resistance by sealing in the MDF edge.

Plymasters Perfect Matte edge tape is available in ABS unglued 23 x 1mm and 43 x 1mm - with an optional pre-glue service for easier application.

Fixing

For laminate surfaces we recommend chipboard screws which can be found at your local retailer.



