




Plymasters

Classique Range


Decorative veneer on a light-weight European poplar core suitable for wall & ceiling linings. Alternative to Gib linings and comes in a range of finishes.

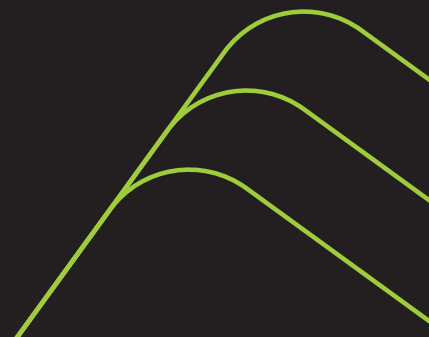

Classique Range

Decorative Veneer on a poplar core.

Key Features:

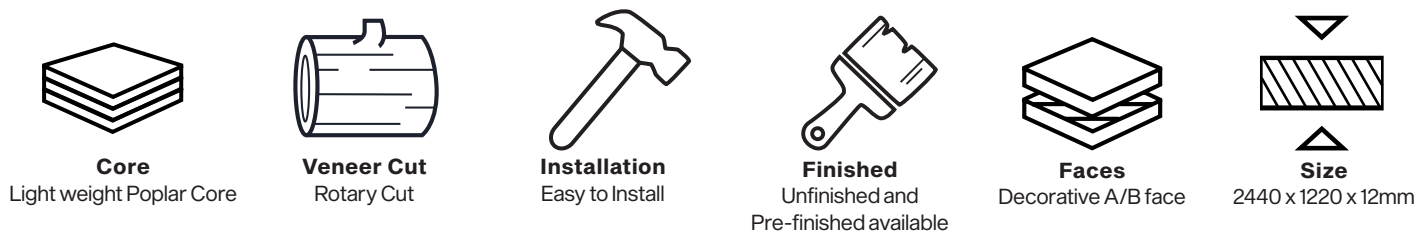

Code	Size	Thickness	Colour	Weight	Grading	Finish
V2109-B	2440 x 1220	9mm	Euro Birch	14kg	AB	Unfinished
V2112-B	2440 x 1220	12mm	Euro Birch	18kg	AB	Unfinished
V2112-PRE-B	2440 x 1220	12mm	Euro Birch-Pre	18.5kg	AB	Clear Pre-finished
V2112-W	2440 x 1220	12.5mm	White Oak	18kg	AB	Unfinished
V2112-PRE-W-O	2440 x 1220	12.5mm	White Oak-Pre	18.5kg	AB	Clear Pre-finished
V2112-C	2440 x 1220	12mm	Canadian Oak	18kg	AB	Unfinished
V2112-PRE-C	2440 x 1220	12mm	Canadian Oak - Pre	18.5kg	AB	Clear Pre-finished
V2112-E	2440 x 1220	12mm	Eucalyptus	18kg	AB	Unfinished
V2112-PRE-E	2440 x 1220	12mm	Eucalyptus-Pre	18.5kg	AB	Clear Pre-finished

Scope of Use:

- Wall & Ceiling Linings
- Feature Walls
- Light Weight Cabinetry
- Commercial Spaces

Classique Veneers:



The Classique Range

Decorative Veneer on a poplar core.

Technical Specs

Veneer Texture	Fine grain
Glue bond	Class 1 (Interior). Density - 440 - 490Kg/m ³
Origin	Spain
Emissions/Formaldehyde	Class E1 - EN 13986
Prefinished	UV Clear finished 2S, 30% gloss, low VOC

Limitations of use

Interior use only.

Application

Classique is a decorative-grade lining plywood suited to architectural wall and ceiling linings, including feature walls and commercial interior fitouts. Its A/B face grading provides a consistent, high-quality finish, available in a range of finishes.

Handling

Plywood is a natural product that can be affected by changes in weather conditions: moisture and temperature. Increased moisture content or temperature variation may cause internal stresses causing previously flat sheets to bow.

At Plymasters, precautions are taken to minimise this effect. However, once the plywood has left our warehouse we cannot guarantee sheets to remain flat unless fastened. This is particularly important where free standing kitchen/cabinet doors are concerned. When storing panels, stack on a firm raised base with enough support to prevent sagging. Cover the pallet to protect top and edges.

Our products can be found on:



masterspec



EBOSS

ARCHIPRO



Plymasters.co.nz

Certifications / Performance Attributes



0800 344 112 | sales@plymasters.co.nz | plymasters.co.nz

The Classique Range

Decorative Veneer on a poplar core.

Colour Consistency

The Classique Range is a natural product and will have variation in grain pattern and colour. Please check your sheets before starting your project.

Exposure to sunlight and water

As a natural product, The Classique Range may fade slightly over time, this a natural effect of plywood a UV protectove clear coat may help prevent some fading. All plywood must be properly sealed to prevent swelling and mould from moisture.

Sealing and Coating Recommendations

To ensure water tightness and longevity please seal both sides and edges of your unifinsihed plywood. We suggest a clear, water-based sealer or lacquer. Oil based sealants may have an effect on the colour of lighter plywoods. While prefinished panels will not need coating, cut edges must be be sealed to prevent moisture damage.

Preparation for Coating

Please inspect plywood for defects before cutting or coating. We cannot replace altered sheets.

Lightly sanding the plywood before coating will help ensure a smooth finish. To prepare for coating, the plywood must be completely clean, dried and free of debris oil, grease and wax.

Fixing

There are a range of fixing types available for plywood depending on the application. We suggest timber screws for cabinetry, joinery and furniture applications.

Fixing options for ceiling and wall linings include glue and pin, construction adhesive (glue), hidden fixing systems and more. Please refer to our Soudal glue fixing guides on our website resources page for glue fixing recommendations with and without metal fixings (pins).





Classique Candian Oak
Design Builders

